



## How to use the system – Panel

Mobile access area (NFC)

Status indicator

Touch screen

Energy Safe Mode on/off

Switch to Enlarge display mode\*

Open Help screen\*

1 2 3 4

Display keypad\*

Keypad KP-101 (option)

Voice guide (not in use for European market)

Input a value or a number

Clear a value

Login/logout

Switch to main menu

Reset the settings

Stop a process

Start a process

Proof one copy set\*

Copy

Scan/Fax

User Box

Sound Setting

Address book

Utility

Accessibility

Counter

Function Search

Job List

16/02/2016 12:28 Memory 100%

Select function to use.

Access

Menu

\*This is a Register key. In the Administrator Settings it can be assigned to any function.

## Touch screen – Main menu

Display total number of printed pages

Adjust the touch screen / configure touch screen operation

Message display

Change to the functions of the shortcut key

Display active or standby jobs

Toner supply indicator

Shortcut key area\*

Open slide menu

Configure settings/ display use status

Copy

Scan/Fax

User Box

Sound Setting

Address book

Utility

Accessibility

Counter

Function Search

Job List

16/02/2016 12:28 Memory 100%

Select function to use.

\*Up to 25 types of main menu buttons can be registered on this machine. By default, the main menu shows Copy, Scan/Fax, User Box, Sound Setting, Address book, and Utility. Utility is always displayed.

## Operating the touch screen\*

- Tap** to select or determine a menu.
- Double-tap** to retrieve detailed information or enlarge a thumbnail image.
- Drag** to move a display position on an application or preview screen.
- Flick** to scroll an address or job list and feed thumbnail-view pages.
- Long-tap** to display the icon related to the document.
- Drag & Drop** to move a document to the intended place.
- Pan** to move a displayed image.
- Pinch-in/Pinch-out** to enlarge or reduce a preview image.
- Rotate** two fingers to rotate a preview image.


\*Available touch functions vary depending on displayed screen.





## Operation of keypad\*

1. Tap the numerals or the input area on the screen to display the keypad.

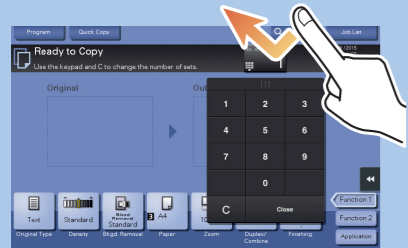


2. If necessary, touch the upper side of the keypad and drag it to another display position.




\*If the system is equipped with the optional hardware keypad KP-101, it can be used instead.

## Basic copy functions – Make a copy

1. Position the original(s).
2. Tap **Copy** in the main menu.
3. Tap the input area to display the keypad.
4. Type in the number of copies.
5. Press the **Start** key.

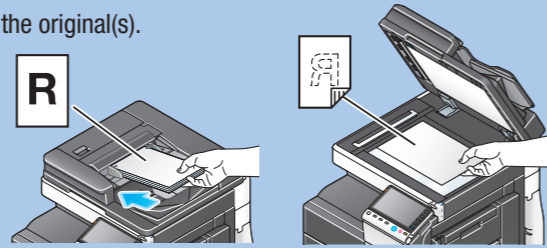

## Copy operations – Basic copy screen



Register a copy program    Display Quick Copy screen    Number of copy sets

- Display job list
- Check copy settings
- Check Finishing settings
- Two times 7 copy functions can be set for each function bar\*
- Specify additional copy settings
- Specify Finishing settings
- Specify Duplex/Combine settings
- Specify a zoom ratio

Input/output image (only visible when originals are placed on platen glass or document feeder)

Specify the type of the original

Adjust the copy density

Adjust the background density

Select paper size and type of the original/change size and type of the paper loaded in paper trays

\*Available functions depend on system configuration.

## Zoom

1. Position the original(s).
2. Tap **Zoom** in the copy screen.
3. Make the desired settings.
4. Tap **OK**.
5. Press the **Start** key.

Automatically reduce/enlarge original size to paper size    Change zoom manually    Different values for X and Y (distortion)

- Copy the entire original including its edges by slightly reducing the original size
- User defined zoom (values can be changed)
- Change user defined zoom values
- Preset zoom values

## Duplex/Combine

1. Position the original(s).
2. Tap **Duplex/Combine** in the copy screen.
3. Make the desired settings.
4. Tap **OK**.
5. Press the **Start** key.


Copy 2 - 8 document pages onto one page

- Select orientation of the original loaded into ADF or placed on the original glass
- Select 1-sided or 2-sided copying
- Specify binding positions for the original and the copies




## Finishing

1. Position the original(s).
2. Tap **Finishing** in the copy screen.
3. Make the desired setting(s)\*.
4. Tap **OK**.
5. Press the **Start** key.

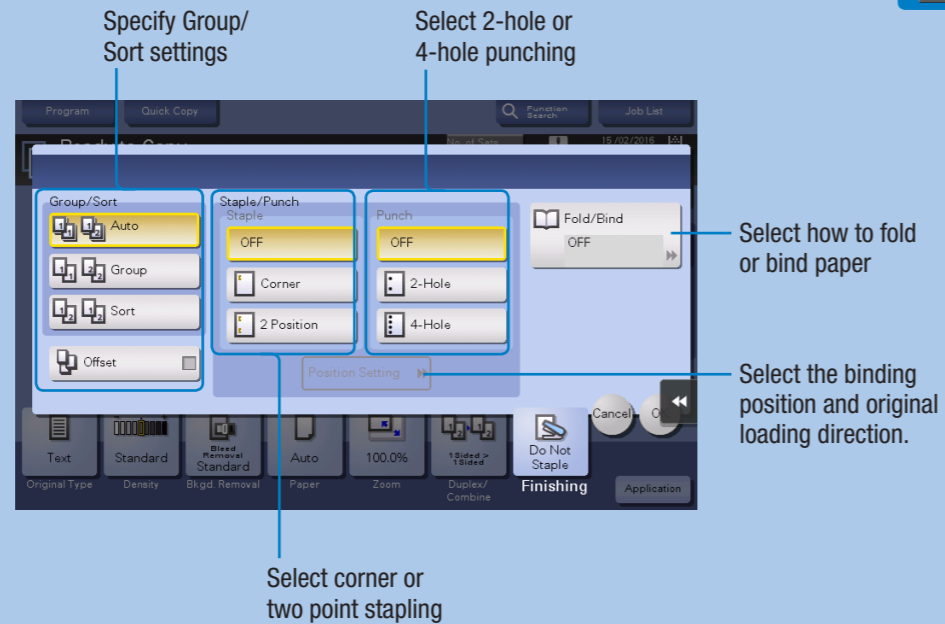

\*Available functions depend on system configuration.


## Scan operations – Scan/Fax screen\*

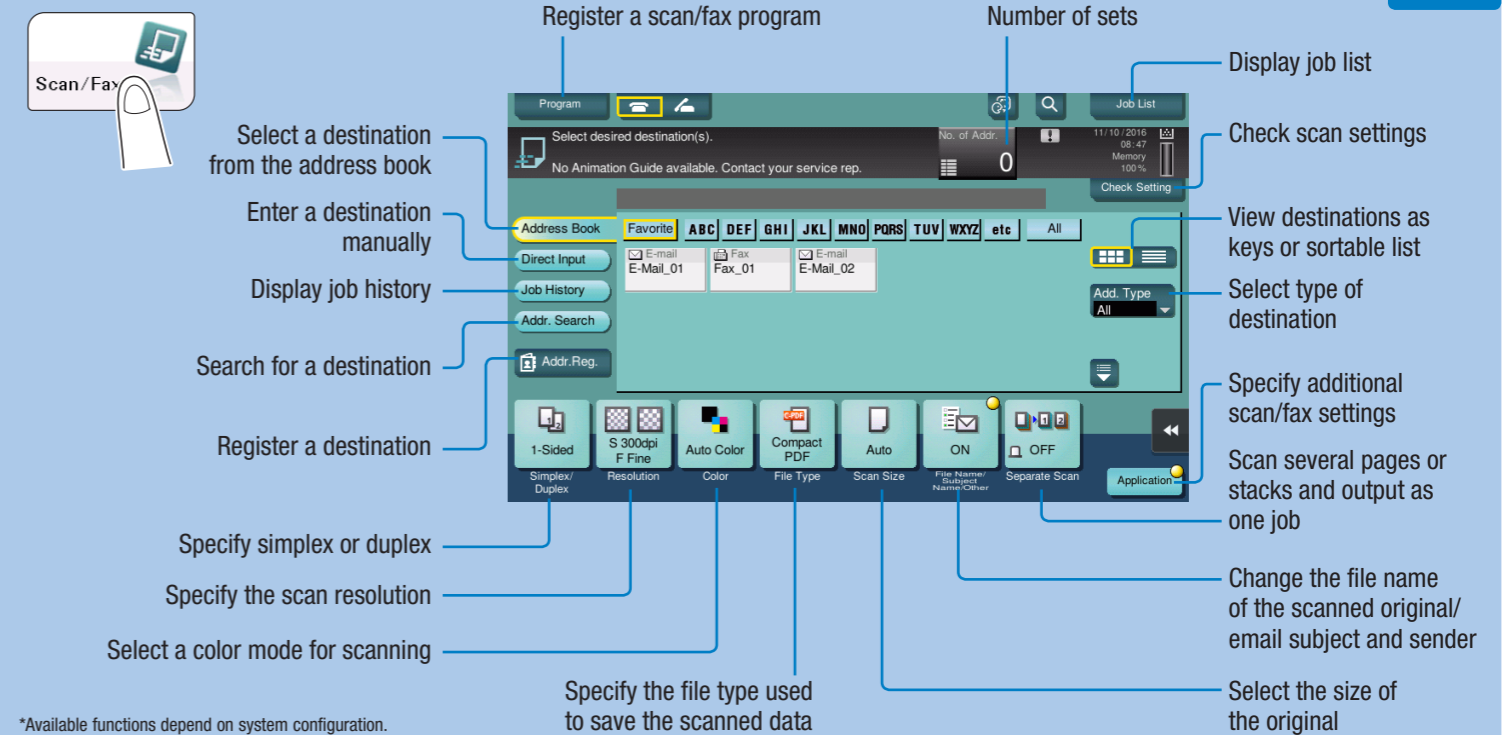


\*Available functions depend on system configuration.

## Scan to USB memory

1. Position the original(s).
2. Plug the USB memory device into the USB port.




3. Tap **Save a document to External Memory**.

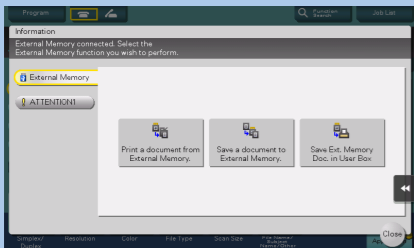


4. Make the desired setting(s).
5. Press the **Start** key.

## Scan to e-mail (Direct input)

1. Position the original(s).
2. Tap **Scan/Fax** in the main menu.
3. Tap **Direct Input**.

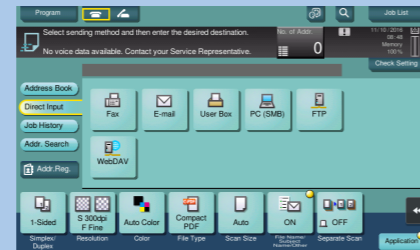


4. Tap **E-mail**.
5. Enter the destination address.

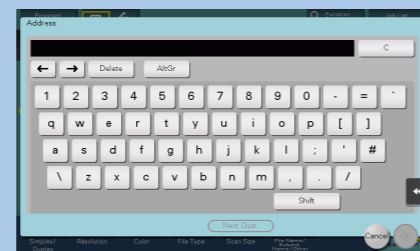

6. Tap **OK**.
7. Press the **Start** key.


## Search for a destination

1. Tap **Scan/Fax** in the main menu.  
The destinations categorized into **Favorite** are displayed.
2. Tap **Addr. Search**.
3. Tap **Name Search** or **Address Search**.
4. Enter the search text and tap **Search**.
5. Select the destination from the search result.
6. Press the **Start** key.

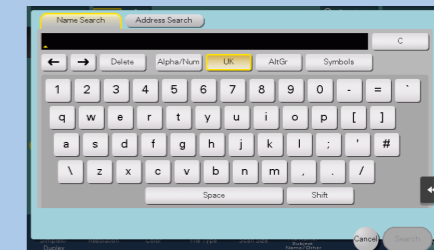

## Sending data to multiple destinations


1. Position the original(s).
2. Tap **Scan/Fax** in the main menu.  
The destinations categorized into **Favorites** are displayed.
3. Tap **Add. Type**.
4. Select the desired type of destination.
5. Specify two or more destinations.
6. Press the **Start** key.

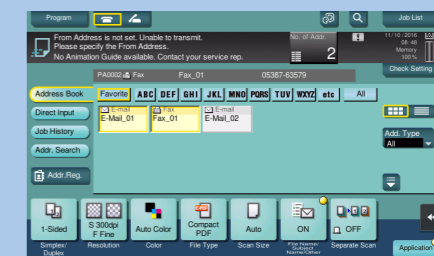



## Register a destination

1. Tap **Scan/Fax** in the main menu.
2. Tap **Addr. Reg.**
3. Tap **New**.
4. Select the type of destination you want to register.
5. Enter the destination information and tap **Register**.

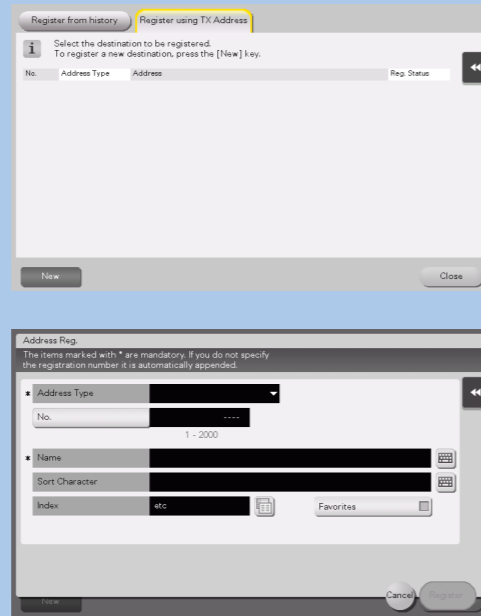

## Box operations – User Box screen




Display **public** user boxes (documents can be stored here by all users)

Registered user boxes

Display job list

Display **Group** user boxes (only users belonging to the same group can store and use documents)\*

Display **Personal** user boxes (Only accessible by a personal user logged in to the system)\*

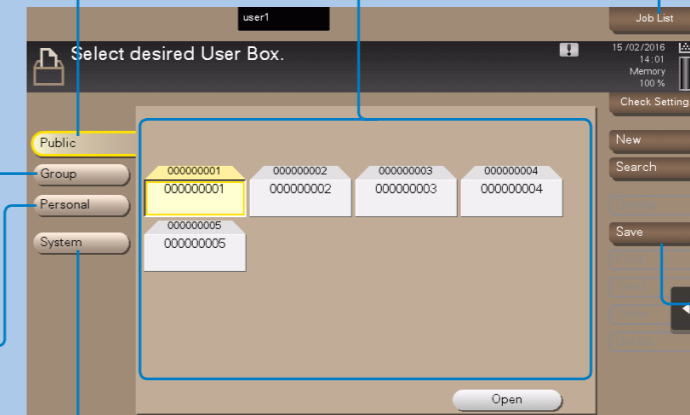


- Check scan settings
- Create a user box
- Search for a user box
- Save file in a user box

Display **System** boxes (used by the system to temporarily store files)

\*Only available if user authentication is enabled. Not displayed when an unauthorized user has logged in.


## Create a user box (Public)

1. Tap **Utility** in the main menu.
2. Tap **One-Touch/User Box Registration**.
3. Tap **Create User Box**.
4. Tap **Public/Personal User Box**.
5. Tap **New**.
6. Enter the registration information and tap **OK**.

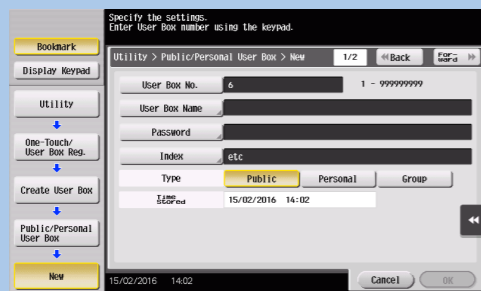


## Save file in a public user box

1. Position the original(s).
2. Tap **User Box** in the main menu.
3. Tap **Public**.
4. Select the desired user box and tap **Save**.
5. Set the file save options and scan settings if necessary.
6. Press the **Start** key. The file is saved.

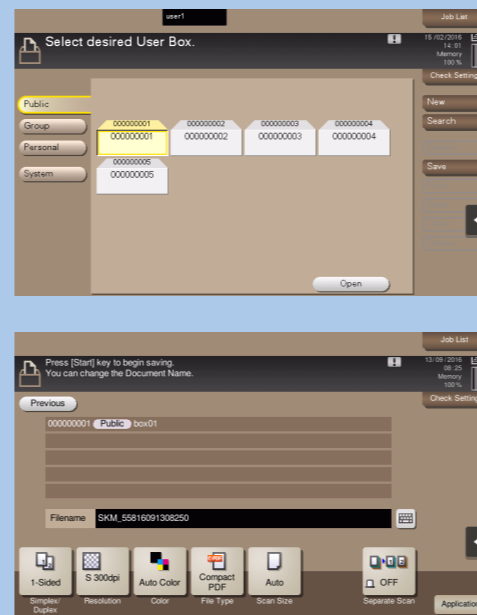


## Fax operations (only with fax option) – Send a fax

1. Position the original(s).

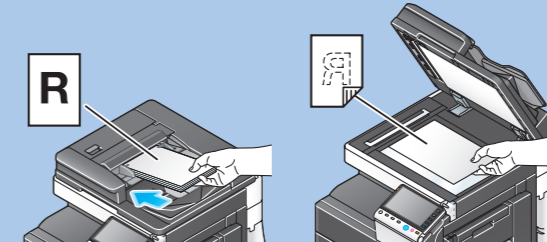

2. Tap **Scan/Fax** in the main menu.



3. Tap **Direct Input**.
4. Tap **Fax**.

5. Type in the fax number.



6. Press the **Start** key.

